


Our flexible and rigid LED strips are made of SMDs (surface mounted diodes) with over 20 different versions available. As always, we customize LED strips for your application. We sell complete reels or custom lengths with or without attached wires and connectors. Let us know your needs and we will accommodate you! All white colored Wessel LED strip lighting is UL listed and has met our rigid research and development standards. You simply can't buy a better LED!



Regular LED


SKU	Length feet / M	Width inch / mm	LED/ft	Light Color (K)	Connection V/DC	AMP	Watt/ft
30001579	16.4 / 5	0.32 / 8.2	9	3200-3500K	12	0.06	0.72
30001643	16.4 / 5	0.32 / 8.2	9	4000-4500K	12	0.06	0.72
30001580	16.4 / 5	0.32 / 8.2	9	5800-6500K	12	0.06	0.72
30001597	16.4 / 5	0.32 / 8.2	18	3200-3500K	12	0.12	1.44
30001581	16.4 / 5	0.32 / 8.2	18	4000-4500K	12	0.12	1.44
30001419	16.4 / 5	0.32 / 8.2	18	5800-6500K	12	0.12	1.44
30001420	16.4 / 5	0.32 / 8.2	36	3200-3500K	12	0.24	2.88
30001343	16.4 / 5	0.32 / 8.2	36	4000-4500K	12	0.24	2.88
30001538	16.4 / 5	0.32 / 8.2	36	5800-6500K	12	0.24	2.88

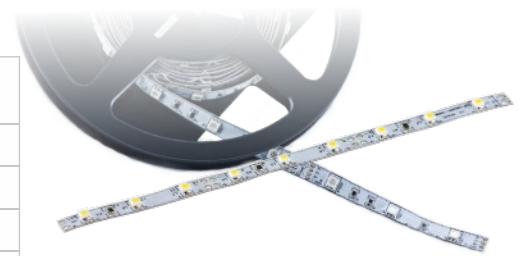

We use high quality, time tested LED components to ensure long duration, trouble free operation of our LED lighting systems.

BLUE LED

SKU	Length feet / M	Width inch / mm	LED/ft	Light Color (K)	Connection V/DC	AMP	Watt/ft
30001780	16.4 / 5	0.32 / 8.2	18	blue	12	0.12	1.44

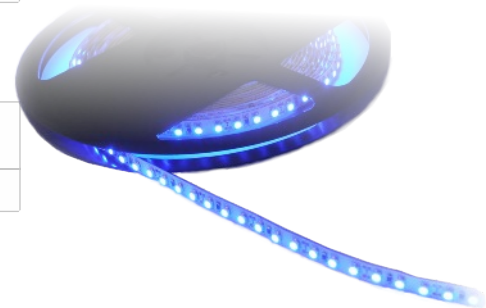

RGB LED

SKU	Length feet / M	Width inch / mm	LED/ft	Light Color (K)	Connection V/DC	AMP	Watt/ft
30001591	16.4 / 5	0.39 / 10	9	RGB	12	0.18	2.16
30001592	16.4 / 5	0.39 / 10	18	RGB	12	0.36	4.32



5050 SMD HIGH INTENSE

SKU	Length feet / M	Width inch / mm	LED/ft	Light Color (K)	Connection V/DC	AMP	Watt/ft
30001594	16.4 / 5	0.39 / 10	18	3200-3500	12	0.36	4.32
30001642	16.4 / 5	0.39 / 10	18	5800-6200	12	0.36	4.32

Show us your project and we will pair it with the right LED strip lighting.

Rigid LED

SKU	Length pcs inch / mm	Width inch / mm	LED/pcs	Light Color (K)	Connection V/DC	AMP	Watt/ft
20001161	15.35 / 390	0.41 / 10.5	66	4000	12	0.45	4.1
30001642	15.35 / 390	0.41 / 10.5	66	6000	12	0.45	4.1

